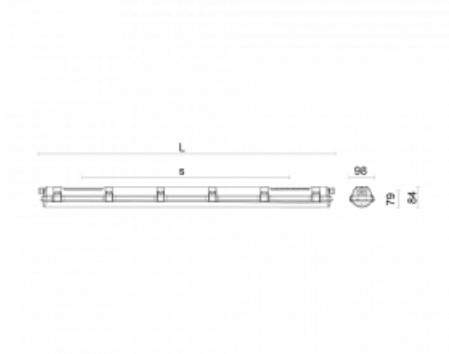



**Luminaire**

# Kopti

**900-200K-10GEE/830, S**

The product is only available on request.


**Technical drawing**


|                              |                                 |
|------------------------------|---------------------------------|
| Type of installation         | Surface, Suspended              |
| Light distribution           | Direct                          |
| Luminaire shape              | Linear                          |
| Colour of the luminaires     | Silver                          |
| Material                     | Plastic                         |
| Lifetime                     | L80/B20 50 000 hours            |
| Warranty                     | 60 months                       |
| Description of luminaires    | Luminaire surface/suspended     |
| Dimensions                   | 615 mm × 98 mm × 84 mm          |
| Light source                 | LED MODUL                       |
| Type of optical system       | Opal diffuser                   |
| Luminous flux                | 1610 lm ± 10 %                  |
| Colour Temperature           | 3000 K warm white               |
| Luminous efficacy            | 134 lm/W                        |
| Colour rendering index       | 80                              |
| Luminaire power input        | 12 W ± 10 %                     |
| Connection of the luminaires | Electronic ballast non-dimmable |
| Electrical voltage           | 220-240V                        |
| Frequency                    | 50/60Hz                         |


**CE IP 66**