



Luminaire


Kopti

900-200K-10GGD/830, S

The product is only available on request.



Technical drawing

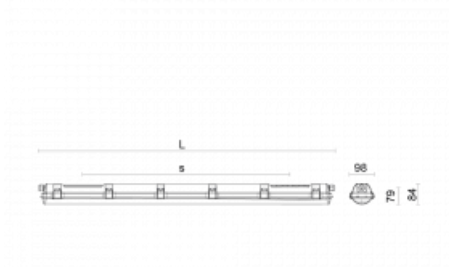

| | |
|---------------------------|-----------------------------|
| Type of installation | Surface, Suspended |
| Light distribution | Direct |
| Luminaire shape | Linear |
| Colour of the luminaires | Silver |
| Material | Plastic |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire surface/suspended |
| Dimensions | 615 mm × 98 mm × 84 mm |
| Light source | LED MODUL |

| | |
|------------------------|---------------|
| Type of optical system | Opal diffuser |
|------------------------|---------------|

| | |
|---------------|----------------|
| Luminous flux | 2270 lm ± 10 % |
|---------------|----------------|

| | |
|--------------------|-------------------|
| Colour Temperature | 3000 K warm white |
|--------------------|-------------------|

| | |
|-------------------|----------|
| Luminous efficacy | 134 lm/W |
|-------------------|----------|

| | |
|------------------------|----|
| Colour rendering index | 80 |
|------------------------|----|

| | |
|-----------------------|-------------|
| Luminaire power input | 17 W ± 10 % |
|-----------------------|-------------|

| | |
|------------------------------|---------------|
| Connection of the luminaires | DALI dimmable |
|------------------------------|---------------|

| | |
|--------------------|----------|
| Electrical voltage | 220-240V |
|--------------------|----------|

| | |
|-----------|---------|
| Frequency | 50/60Hz |
|-----------|---------|

 **CE** IP 66