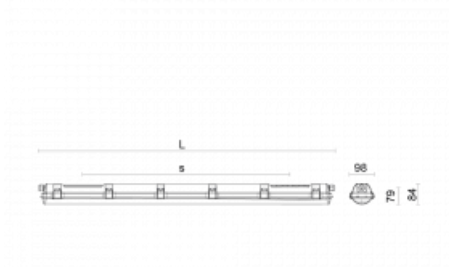



**Luminaire**

# Kopti

**900-200K-20GGD/830, S**

The product is only available on request.


**Technical drawing**


|                              |                             |
|------------------------------|-----------------------------|
| Type of installation         | Surface, Suspended          |
| Light distribution           | Direct                      |
| Luminaire shape              | Linear                      |
| Colour of the luminaires     | Silver                      |
| Material                     | Plastic                     |
| Lifetime                     | L80/B20 50 000 hours        |
| Warranty                     | 60 months                   |
| Description of luminaires    | Luminaire surface/suspended |
| Dimensions                   | 1175 mm × 98 mm × 84 mm     |
| Light source                 | LED MODUL                   |
| Type of optical system       | Opal diffuser               |
| Luminous flux                | 4480 lm ± 10 %              |
| Colour Temperature           | 3000 K warm white           |
| Luminous efficacy            | 149 lm/W                    |
| Colour rendering index       | 80                          |
| Luminaire power input        | 30 W ± 10 %                 |
| Connection of the luminaires | DALI dimmable               |
| Electrical voltage           | 220-240V                    |
| Frequency                    | 50/60Hz                     |


**CE IP 66**