



Luminaire


Kopti

900-200K-20GGM3/840, S

The product is only available on request.



Technical drawing

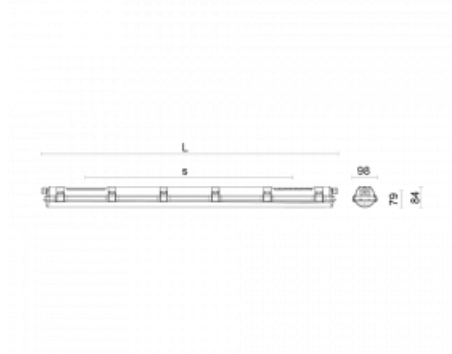

Type of installation	Surface, Suspended
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	Silver
Material	Plastic
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/suspended
Dimensions	1175 mm × 98 mm × 84 mm
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux	4720 lm ± 10 %
Colour Temperature	4000 K cool white
Luminous efficacy	157 lm/W
Colour rendering index	80
Luminaire power input	30 W ± 10 %
Connection of the luminaires	Electronic ballast non-dimmable with 3h emergency
Electrical voltage	220-240V
Frequency	50/60Hz

 **CE** IP 66