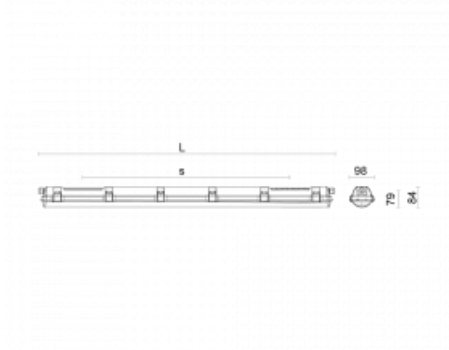



**Luminaire**

# Kopti

**900-200K-25GGD/M3P/830, S**

The product is only available on request.


**Technical drawing**


Type of installation	Surface, Suspended
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	Silver
Material	Plastic
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/suspended
Dimensions	1455 mm × 98 mm × 84 mm
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux	5580 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	147 lm/W
Colour rendering index	80
Luminaire power input	38 W ± 10 %
Connection of the luminaires	DALI dimmable with EM PRO 3h emergency
Electrical voltage	220-240V
Frequency	50/60Hz


**CE IP 66**