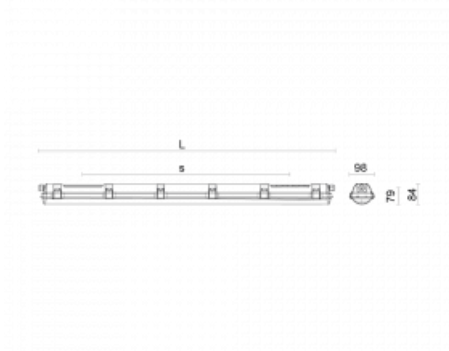



Luminaire

Kopti

900-200K-25GGM3/840, S

The product is only available on request.


Technical drawing


| | |
|------------------------------|---|
| Type of installation | Surface, Suspended |
| Light distribution | Direct |
| Luminaire shape | Linear |
| Colour of the luminaires | Silver |
| Material | Plastic |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire surface/suspended |
| Dimensions | 1455 mm × 98 mm × 84 mm |
| Light source | LED MODUL |
| Type of optical system | Opal diffuser |
| Luminous flux | 5880 lm ± 10 % |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 155 lm/W |
| Colour rendering index | 80 |
| Luminaire power input | 38 W ± 10 % |
| Connection of the luminaires | Electronic ballast non-dimmable with 3h emergency |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |


CE IP 66