

## Family

# Global Trac





Type of installation Recessed, Surface, Suspended

Light distribution Direct




Colour of the  
luminaires White

Material Aluminium

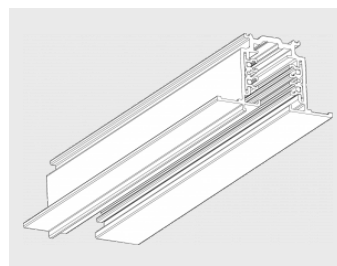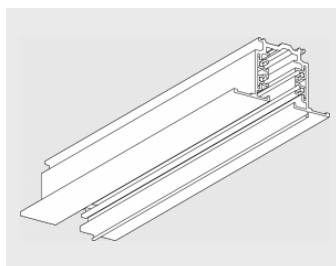


## Luminaire family variants Global Trac





Global Trac on/off

		<b>Assembly</b>	<b>Light distribution</b>
			
		<b>Energy class</b>	<b>Marks</b>
		energy_class_g	
Notes	Colour of the luminaires		
	Ra	0	

Global Trac DALI



		<b>Assembly</b>	<b>Light distribution</b>
			
		<b>Energy class</b>	<b>Marks</b>
		energy_class_g	
Notes	Colour of the luminaires		
	Ra	0	

Global Trac on/off

		<b>Assembly</b>	<b>Light distribution</b>
			
		<b>Energy class</b>	<b>Marks</b>
		energy_class_g	

Notes	Colour of the luminaires	
	Ra	0


Global Trac DALI

Assembly		Light distribution	
			
Energy class		Marks	
energy_class_g			


Notes	Colour of the luminaires	
	Ra	0

## Legend

### Type of installation

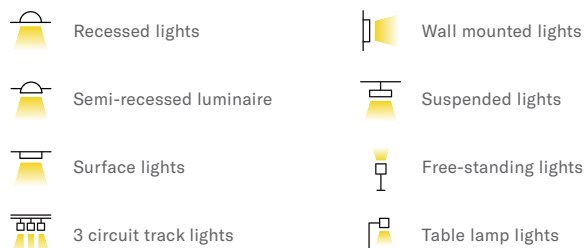


### Light distribution



### Light source



### Marks

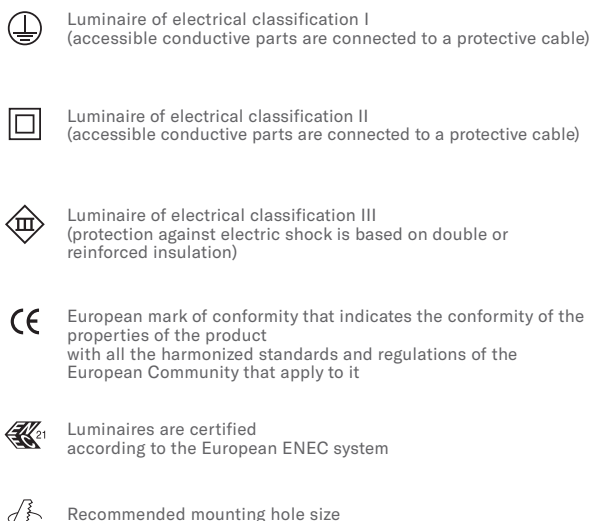

**IPxy** IP code indicating the degree of protection of live parts

**EAC** Eurasian Conformity

## 11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

**Optic system**

**Electrical connection**

**Colour**

### Optic system

B	Microprismatic system, low UGR	L	Plain aluminium reflector
C	Clear cover	M	Matt parabolic louvre
D	Asymmetric reflector	S	SPOT - narrow angle
E	Polished parabolic louvre, high LOR	U	MEDIUM - middle angle
F	FLOOD - wide angle	W	Wide beam angle
I	Microprismatic optical system	Z	Plastic louver, low UGR
K	Opal diffuser		


### Electrical connection

/BT	Luminaires controlled via Bluetooth technology	P	Sensor and electronic ballast
D	DALI dimmable	T	By switch dimmable (touch dimm)
E	Electronic ballast non-dimmable	TD	DALI or by switch (touch dimm) dimmable
M	Electronic ballast non-dimmable with 1h emergency	U	Dimmable luminaire with dimmer on the luminaire
M3	Electronic ballast non-dimmable with 3h emergency		

### Colour

W	 RAL 9003	B	 RAL 9005	S	 TIGER 09/90530
1021	 RAL 1021	2000	 RAL 2000	3020	 RAL 3020
5015	 RAL 5015	6018	 RAL 6018	7016	 RAL 7016
9006	 RAL 9006	9010	 RAL 9010		

### Značky typu

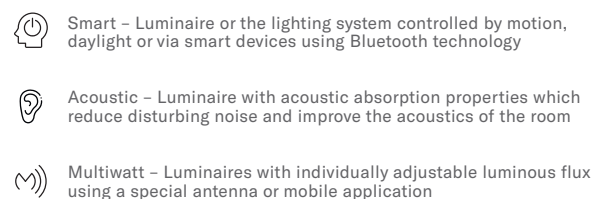

UGR UGR – The luminaire suitable for office spaces