



Type of installation	Surface, Suspended
Light distribution	Direct
Colour of the luminaires	Black, Silver, White
Colour Temperature	3000 K warm white, 4000 K cool white, 5000 K cool white, 3500 K neutral white
Material	Aluminium
Light source	LED MODUL
MacAdam Light source	2
Connection of the luminaires	ON/OFF DALI ON/OFF + 1h emergency ON/OFF + 3h emergency
Lifetime	L80/B20, L80/B10 50 000 hours
Warranty	5 years



Family

Rundo120

Circular luminaires with an aluminium profile with a height of 120 mm and an excellent luminous efficacy of up to 145 lm/W. A Rundo120 has wide range of functions and dimensions with a diameter of up to 1150 mm. These surface or pendant luminaires can be used as basic lighting features in commercial and residential spaces. Thanks to sophisticated technology, the luminaires do not cause glare and the lighting can be adapted to smaller or large commercial spaces. You can choose between a version with an opal diffuser made of PMMA or a microprismatic optical system.

Luminaire family variants Rundo120

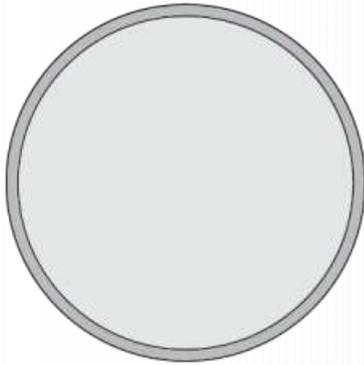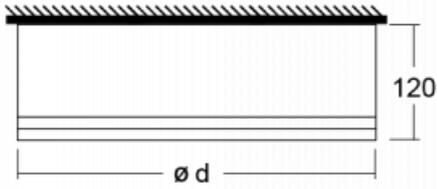

Rundo 120

Assembly

Light distribution

Energy class
Marks

energy_class_g



Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
15-290K-10GEE/840, W	ø 950 × 120	73.6	7860	4000	-
15-290K-10GGE/840, W	ø 950 × 120	88.1	10980	4000	-
15-290K-10GHE/840, W	ø 950 × 120	112	13740	4000	-
15-2B0K-10GEE/840, W	ø 1240 × 120	94	10240	4000	-
15-2B0K-10GGE/840, W	ø 1240 × 120	129	13910	4000	-
15-2B0K-10GHE/840, W	ø 1240 × 120	137.1	17170	4000	-
15-2C0K-10GEE/840, W	ø 1500 × 120	115	12590	4000	-
15-2C0K-10GGE/840, W	ø 1500 × 120	130.8	16950	4000	-
15-2C0K-10GHE/840, W	ø 1500 × 120	161.4	21010	4000	-

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	● ● ●
	Colour Temperature	3000 K warm white 4000 K cool white 5000 K cool white
	Optic system	Microprisma Opal diffuser
	Connection of the luminaires	ON/OFF DALI ON/OFF + 1h emergency ON/OFF + 3h emergency
	Ra	80

Luminaires come complete with all necessary accessories.

Rundo 120

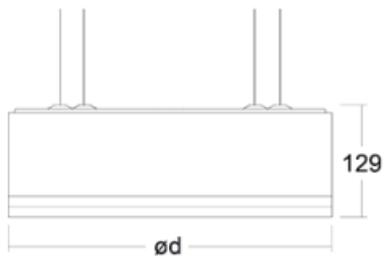

Assembly



Energy class

energy_class_g

Light distribution



Marks

Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
15-590K-10GEE/840, W	∅ 950 × 120	73.6	7860	4000	-
15-590K-10GGE/840, W	∅ 950 × 120	88.1	10980	4000	-
15-590K-10GHE/840, W	∅ 950 × 120	112	13740	4000	-
15-5B0K-10GEE/840, W	∅ 1240 × 120	94	10240	4000	-
15-5B0K-10GGE/840, W	∅ 1240 × 120	129	13910	4000	-
15-5B0K-10GHE/840, W	∅ 1240 × 120	137.1	17170	4000	-
15-5C0K-10GEE/840, W	∅ 1500 × 120	115	12590	4000	-
15-5C0K-10GGE/840, W	∅ 1500 × 120	130.8	16950	4000	-
15-5C0K-10GHE/840, W	∅ 1500 × 120	161.4	21010	4000	-

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white 3500 K neutral white
	Optic system	Microprisma Opal diffuser
	Connection of the luminaires	ON/OFF DALI ON/OFF + 1h emergency ON/OFF + 3h emergency
	Ra	80

Luminaires come complete with all necessary accessories.

Legend

Type of installation




Light distribution



Light source



Marks

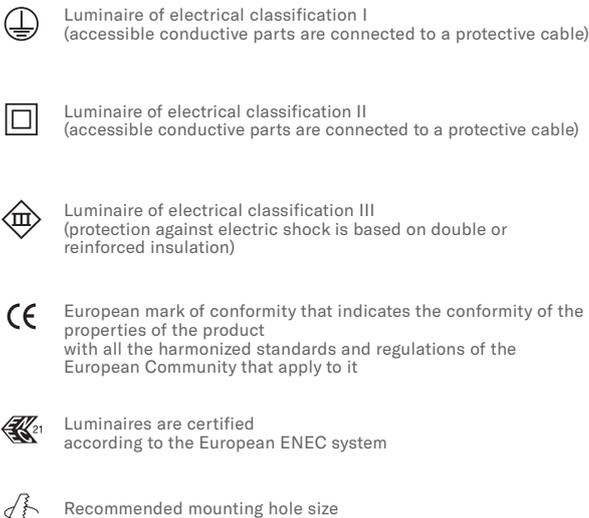

IPxy IP code indicating the degree of protection of live parts

EAC Eurasian Conformity

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

Optic system

Electrical connection

Colour

Optic system

B	Microprismatic system, low UGR	L	Plain aluminium reflector
C	Clear cover	M	Matt parabolic louvre
D	Asymmetric reflector	S	SPOT - narrow angle
E	Polished parabolic louvre, high LOR	U	MEDIUM - middle angle
F	FLOOD - wide angle	W	Wide beam angle
I	Microprismatic optical system	Z	Plastic louvre, low UGR
K	Opal diffuser		

Electrical connection

/BT	Luminaires controlled via Bluetooth technology	P	Sensor and electronic ballast
D	DALI dimmable	T	By switch dimmable (touch dimm)
E	Electronic ballast non-dimmable	TD	DALI or by switch (touch dimm) dimmable
M	Electronic ballast non-dimmable with 1h emergency	U	Dimmable luminaire with dimmer on the luminaire
M3	Electronic ballast non-dimmable with 3h emergency		

Colour

W	 RAL 9003	B	 RAL 9005	S	 TIGER 09/90530
1021	 RAL 1021	2000	 RAL 2000	3020	 RAL 3020
5015	 RAL 5015	6018	 RAL 6018	7016	 RAL 7016
9006	 RAL 9006	9010	 RAL 9010		

Značky typu

 Smart – Luminaire or the lighting system controlled by motion, daylight or via smart devices using Bluetooth technology

 Acoustic – Luminaire with acoustic absorption properties which reduce disturbing noise and improve the acoustics of the room

 Multiwatt – Luminaires with individually adjustable luminous flux using a special antenna or mobile application

UGR UGR – The luminaire suitable for office spaces