



Type of installation Wall mounted, Suspended

Light distribution Direct-indirect

Luminaire shape Linear

Colour of the luminaires White

Material Aluminium

Lifetime L90/B50 50 000 hours

Warranty 60 months

Description of luminaires Luminaire wall mounted/suspended

Dimensions 2244 mm × 80 mm × 93 mm

Light source LED MODUL

Type of optical system Opal diffuser

Luminous flux 10290 lm ± 10 %

Colour Temperature 3000 K warm white

Luminous efficacy 123 lm/W

MacAdam Light source 2

Colour rendering index 80

UGR max. X=4H Y=8H, ρ=70,50,20 21.7

Luminaire


Lina80-S

11S-501K-40GGE/830, W



Lina80-S luminaires are available in recessed, surface, suspended or wall mounted versions, including the illuminated corner segments. Lina80-S system luminaire can be used to create different shapes or long lines, with special joints that prevent any light to shine through, creating thus a seamless visual effect, suitable for small offices as well as big halls.

Technical drawing

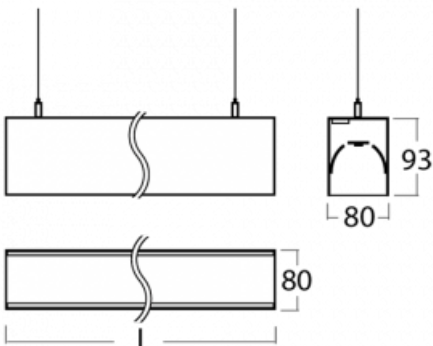

Curve



Luminaire power input 84 W \pm 10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

Downloads

Installation instructions



Photos



Accessories


00-00200, N
straight connector



00-00300, N
wire suspension
2000mm



00-00301, N
wire suspension
4000mm



00-00302, N
wire suspension
6000mm



00-00352, K
cable 3x0,75 2000mm



00-00355, K
cable 5x0,75 2000mm



00-00356, K
cable 5x0,75 4000mm



00-00358, K
cable 3x0,75 4000mm



00-00360, K
cable 3x0,75 6000mm



00-00363, K
cable 5x1,5 2000mm



00-00364, K
cable 5x1,5 4000mm



00-00365, K
cable 5x1,5 6000mm



00-00370, W
ceiling cup 80x80x32mm



00-01200, F
Accessory for gear-tray
release



00-20101, W
2xend cap - metal, 5-
conductor terminal box,
grommet; Lipo80/Lina80



00-20103, W
2xend cap - plastic, 5-
conductor terminal box,
grommet; Lipo80/Lina80



00-20700, W
2 pcs of wall fastening
Lipo/Lina



00-51300, W
set for suspension into
3-phase track, non-
dimmable luminaires