



Luminaire


Zuli-S

121S-230M-30GEE/840, W



We realize that there is beauty in simplicity, so we have created our Zuli-S system luminaire. The Zuli-S luminaire is based on the timeless shape that everyone has known for many years. The luminaires come with a very efficient LED light source, thanks to which the luminaires have a very high economical and, last but not least, ecological value, as they require a relatively small amount of energy. Zuli-S luminaires can be fitted with a parabolic louvre made of polished aluminium sheet or an opal diffuser.

Technical drawing

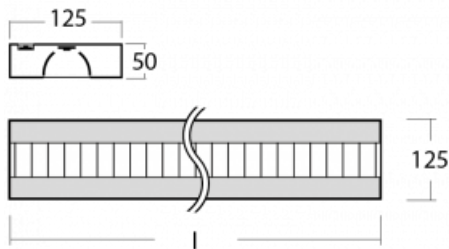

| | |
|-----------------------------------|--------------------------|
| Type of installation | Surface |
| Light distribution | Direct |
| Luminaire shape | Angular |
| Colour of the luminaires | White |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire surface |
| Dimensions | 1695 mm × 125 mm × 50 mm |
| Light source | LED MODUL |
| Type of optical system | Matt parabolic louvre |
| Luminous flux | 4370 lm ± 10 % |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 118 lm/W |
| MacAdam Light source | 2 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 16.5 |

Curve



Luminaire power input 36.9 W ± 10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

Downloads

Installation instructions



Photos



Accessories

00-00352, K
 cable 3x0,75 2000mm

00-00355, K
 cable 5x0,75 2000mm

00-00356, K
 cable 5x0,75 4000mm

00-00358, K
 cable 3x0,75 4000mm

00-00360, K
 cable 3x0,75 6000mm

00-00363, K
 cable 5x1,5 2000mm

00-00364, K
 cable 5x1,5 4000mm

00-00365, K
 cable 5x1,5 6000mm

00-00370, S
 ceiling cup 80x80x32mm

121-00200, N
 straight connector

121-00300, N
 wire suspension
 2000mm

121-00301, N
 wire suspension
 4000mm

121-00302, N
 wire suspension
 6000mm

121-20101, W
 2xend cap - plastic