



Luminaire


Vali55

178-200U-10GDE/930, S



Its dimensions make the Vali55 luminaire the smallest cylindrical luminaire in our product range. The luminaires feature 4 types of reflectors with various angles of luminosity, thanks to which it also provides a large variability of light outputs. Vali55 has a very subtle minimalist shape, so it fits into a lot of interiors, where it always looks discreet and unobtrusive. The Luminaire comes in a surface, pendant or semi-recessed version, which greatly increases their versatility of use. All of this makes them suitable for commercial premises, bars or hotels or even residential buildings.

Technical drawing

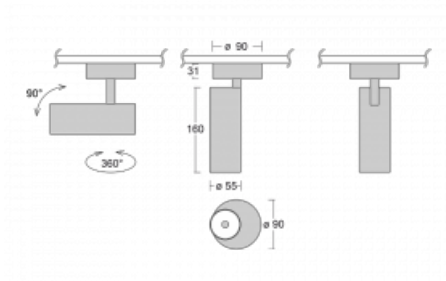

Type of installation	Surface
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface
Dimensions	ø 55 mm × 160 mm
Weight	0.6 kg
Light source	LED MODUL
Type of optical system	Reflector
Luminous flux	1200 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	88 lm/W
MacAdam Light source	3
Colour rendering index	90
Beam angle	27°

Luminaire power input 13.6 W \pm 10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

 **CE** IP 20

Downloads

Installation instructions



Photos

