


**Luminaire**


# Rundo

**190-2A1K-10GHE/840, B**


Circular luminaires with an aluminium profile come in two heights, 62 mm and 87 mm. Rundo luminaires feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Rundo luminaires with a diameter of up to 1150 mm can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

|  |                                |
|--|--------------------------------|
| Type of installation                   | Surface, Wall mounted          |
| Light distribution                     | Direct-indirect                |
| Luminaire shape                        | Circular                       |
| Colour of the luminaires               | Black                          |
| Material                               | Aluminium                      |
| Lifetime                               | L80/B20 50 000 hours           |
| Warranty                               | 60 months                      |
| Description of luminaires              | Luminaire surface/wall mounted |
| Dimensions                             | ø 1150 mm × 87 mm              |
| Weight                                 | 28.7 kg                        |
| Light source                           | LED MODUL                      |
| Type of optical system                 | Opal diffuser                  |
| Luminous flux                          | 23900 lm ± 10 %                |
| Colour Temperature                     | 4000 K cool white              |
| Luminous efficacy                      | 133 lm/W                       |
| MacAdam Light source                   | 3                              |
| Colour rendering index                 | 80                             |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 21.7                           |

## Technical drawing

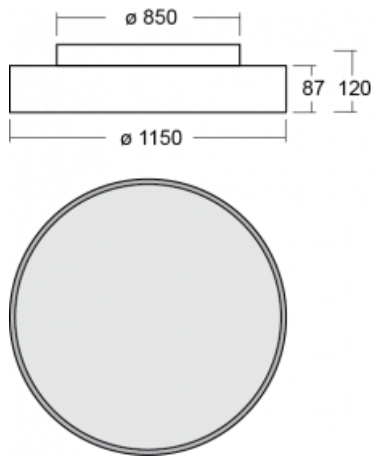

Luminaire power input 179.8 W  $\pm$  10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

## Downloads

Installation instructions



Photos

