



Luminaire


Ture-C

56-283K-10GDD/830, W




It is a cylindrical seated luminaire that has an excellent UGR<19, which means that the luminaire does not glare. The luminaire can be used in offices, meeting rooms and thanks to special sources also in showrooms. RealWhite accentuates the white, StrongColour accentuates the selected colour and RealColour accentuates the actual colour. With Tunable White you adjust the chromaticity temperature according to the time of day. With these sources, illuminated objects look even more appealing.

Technical drawing



| | |
|-----------------------------------|----------------------|
| Type of installation | Surface |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | White |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 60 months |
| Description of luminaires | Luminaire surface |
| Dimensions | ø 185 mm × 240 mm |
| Light source | LED MODUL |
| Type of optical system | Opal diffuser |
| Luminous flux | 1420 lm ± 10 % |
| Colour Temperature | 3000 K warm white |
| Luminous efficacy | 120 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 16.9 |

Curve

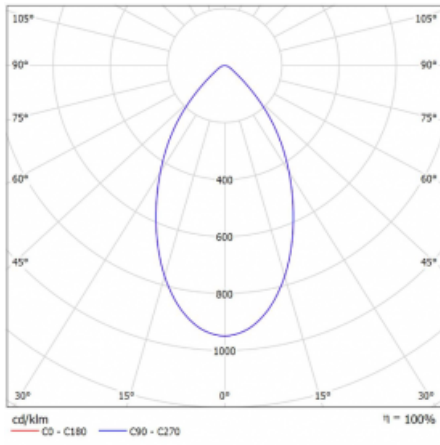

Luminaire power input 11.8 W \pm 10 %

Connection of the luminaires DALI dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

 **CE** IP 20

Downloads

Installation instructions



Photos



Accessories



00-00399, W
suspension set
2000mm, 1 pcs.of
wires, cable
5x0,75mm, ceiling
cup