



Luminaire


Ture-C

56-283K-10GDD/830, W




It is a cylindrical seated luminaire that has an excellent UGR<19, which means that the luminaire does not glare. The luminaire can be used in offices, meeting rooms and thanks to special sources also in showrooms. RealWhite accentuates the white, StrongColour accentuates the selected colour and RealColour accentuates the actual colour. With Tunable White you adjust the chromaticity temperature according to the time of day. With these sources, illuminated objects look even more appealing.

Technical drawing



Type of installation	Surface
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire surface
Dimensions	∅ 185 mm × 240 mm
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux*	1420 lm
Colour Temperature	3000 K warm white
Luminous efficacy	120 lm/W
MacAdam Light source	3
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	16.9

Curve

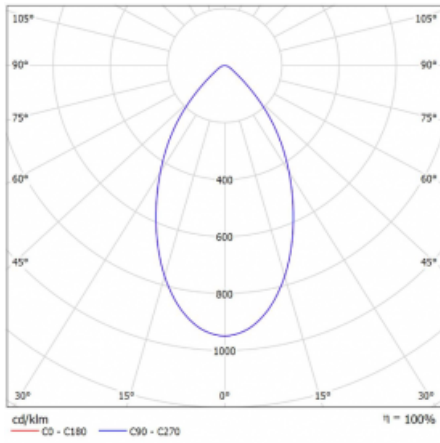

Luminaire power input* 11.8 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

 **CE** IP 20

* $\pm 10\%$

Downloads

Installation instructions



Photos



Accessories



00-00399, W
suspension set
2000mm, 1 pcs.of
wires, cable
5x0,75mm, ceiling
cup